


To the left are two examples of Kwik Focus face plates that could be used to insert into one of four aluminum rings.

These face plates should be made of a stiff material (ie: card stock or sheet plastic) and be black in colour.

The triangular or circular cut-outs should have as clean an edge as possible but this is not absolutely necessary.

The cut-outs should be 120° apart from each other, rotated around the center of the template.

Once the template has been cut to size and the holes have been cut out, the face plate may be glued into the Aluminum ring. We recommend a latex or acrylic caulk or a silicone glue. these are readily available from any hardware store.

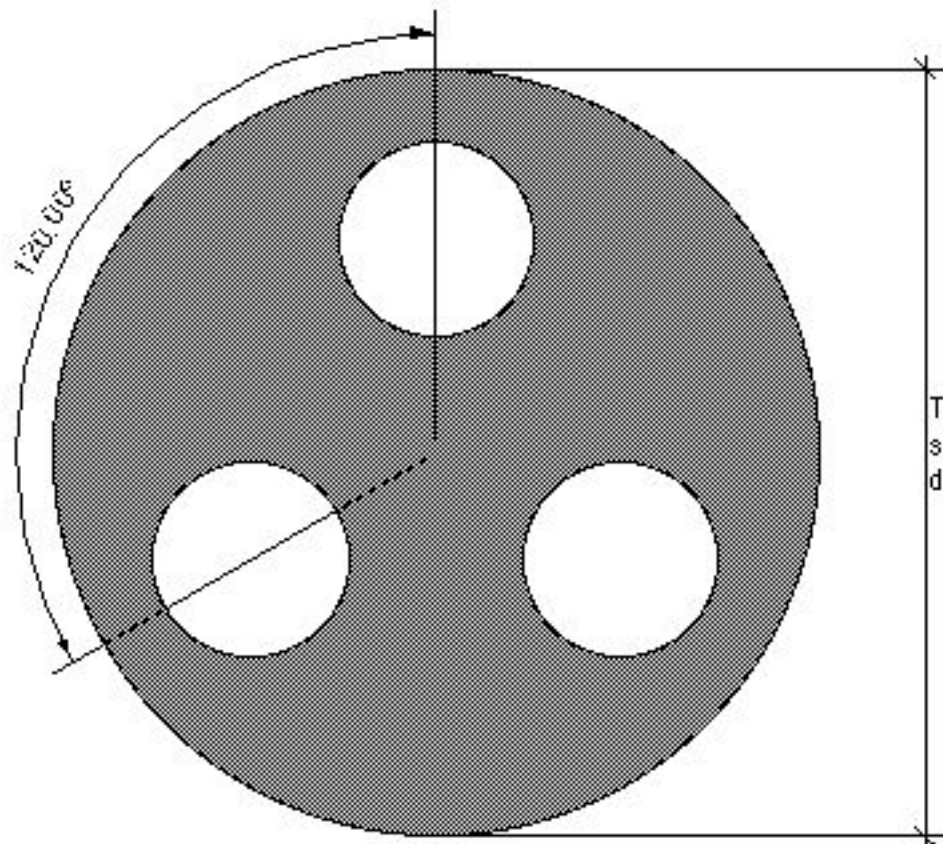

This diameter should be slightly less than the inside diameter of your ring.